

SPECIFICATIONS

ELECTRICAL:



FREQUENCY: 0-6 GHZ
 VSWR 1.25:1 MAX
 IMPEDANCE: 50 OHMS
 OP. TEMP RANGE: -55C to +125C

MECHANICAL:

MATERIAL BODY: BRASS AU PLATING 3μ"
 CENTER CONTACT: Brass
 CONTACT PLATING: Au MIL-G-45204
 INSULATOR: TEFLON

ASSEMBLY

TRIM CABLE AS SHOWN,
 SLIDE CRIMP SLEEVE ON CABLE,
 SOLDER ON CONTACT,
 INSERT CABLE INTO BODY,
 CRIMP

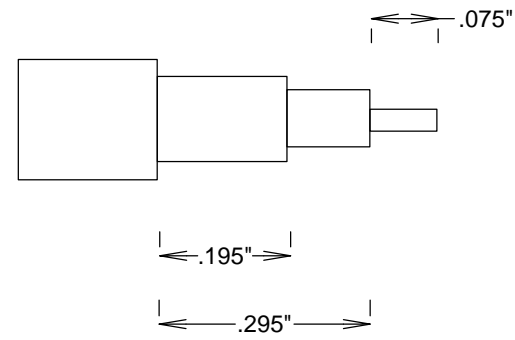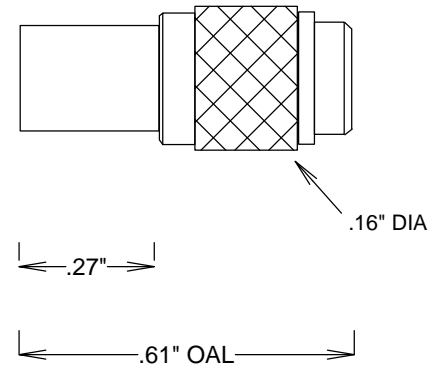

STRIPPING DIMENSIONS

				S. M. ELECTRONICS L.L.C.			
				FAIRVIEW, TX 75069 WWW.SMELECTRONICS.US			
				TITLE			
				MMCX-PLUG RG174 RG316 CRIMP			
SIZE		CAGE CODE		DWG NO		REV	
A		3FKR5		SC9515		--	
SCALE				SHEET			