


# SPECIFICATIONS

## ELECTRICAL:

FREQUENCY: 0-4 GHZ  
 IMPEDANCE: 50 OHMS

## MECHANICAL:

MATERIAL BODY: Ni PLATED BRASS  
 CENTER CONTACT: BeCu  
 CONTACT PLATING: Au MIL-G-45204  
 CAPTIVATED CONTACT  
 INSULATOR: TEFLON  
 INTERFACE: MIL-STD-883A  
 ROHS COMPLIANT  
 OP. TEMP RANGE: -55°C to +155°C

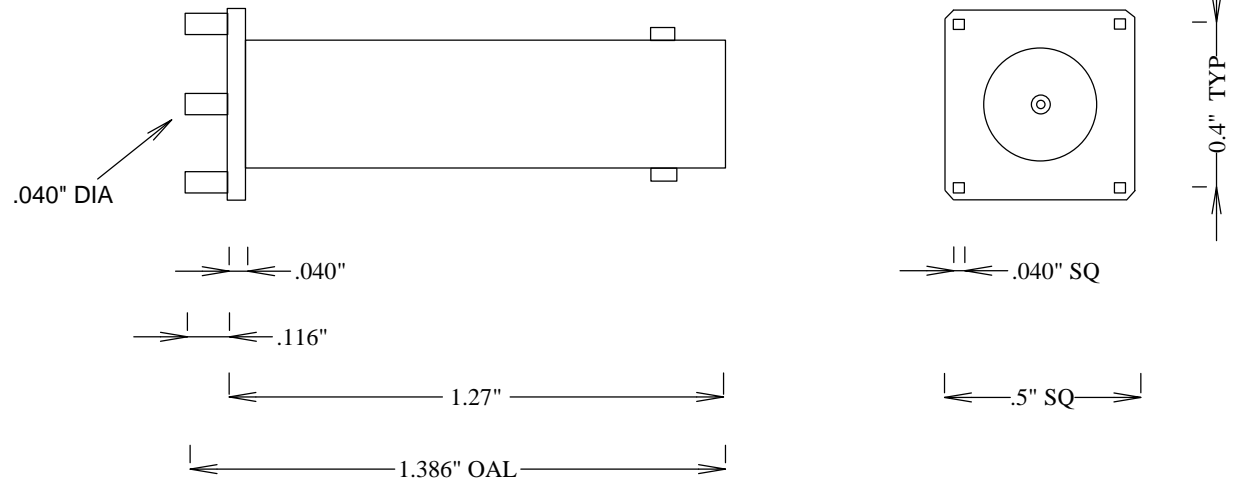

.063" MAX BOARD THICKNESS

|          |  |              |               |   |           |
|----------|--|--------------|---------------|---|-----------|
|          |  |              |               | <b>S. M. ELECTRONICS L.L.C.</b>         |           |
|          |  |              |               | FAIRVIEW, TX 75069 WWW.SMELECTRONICS.US |           |
|          |  |              |               | TITLE                                   |           |
|          |  |              |               | <b>BNC PCB RECEPTACLE</b>               |           |
| SIZE     |  | CAGE CODE    | DWG NO        |   | REV       |
| <b>A</b> |  | <b>3FKR5</b> | <b>SC6215</b> |   | <b>--</b> |
| SCALE    |  |              |               | SHEET                                   |           |