

ADDITIONAL ACCESSORIES

108 - 225 MHz

ELECTRICAL SPECIFICATIONS


Model Number	2450/0	2450/4	2450/5	2450/5A	2450/6
Frequency Band (MHz)	108-225	108-225	108-225	108-225	108-225
Description	Hybrid Coupler	Hybrid 60 W Load	Hybrid 125 W Load	Hybrid 150 W Load	Hybrid 250 W Load
Input Power (each port)	150 W	60 W	125 W	150 W	250 W
Bandwidth	100 MHz	100 MHz	100 MHz	100 MHz	100 MHz
Insertion Loss	3.2 dB	3.2 dB	3.2 dB	3.2 dB	3.2 dB
Isolation Port-to-Port	25+ dB	25+ dB	25+ dB	25+ dB	25+ dB
Impedance	50 Ω	50 Ω	50 Ω	50 Ω	50 Ω
Max. VSWR	1.5:1	1.5:1	1.5:1	1.5:1	1.5:1
Temperature Range	- 22 to +140 °F - 30 to +60 ° C	- 22 to +140 °F - 30 to +60 ° C	- 22 to +140 °F - 30 to +60 ° C	- 22 to +140 °F - 30 to +60 ° C	- 22 to +140 °F - 30 to +60 ° C
List Price	\$480.00	\$570.00	\$755.00	\$810.00	\$920.00

MECHANICAL SPECIFICATIONS


Panel Dimensions: Inches	N/A	3 1/2 x 19	3 1/2 x 19	3 1/2 x 19	8 3/4 x 19
Metric		89 x 483	89 x 483	89 x 483	223 x 483
Connectors: Input	N Female	N Female	N Female	N Female	N Female
Output	N Female	N Female	N Female	N Female	N Female
Finish	EMR Gray	EMR Gray	EMR Gray	EMR Gray	EMR Gray
Ship Weight: lbs.	6	8	10	11	16
kg.	2.8	3.7	4.6	5.0	7.3




2450/0

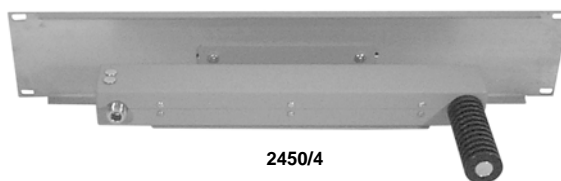


2450/4

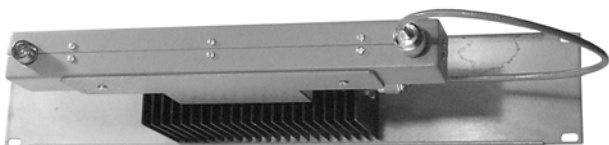

2450/5

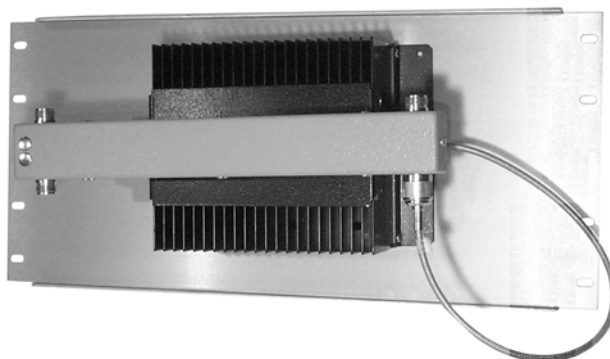

2450/6

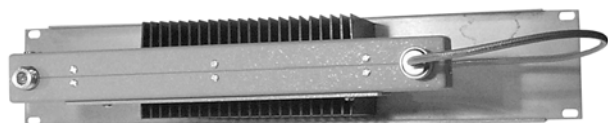

2450/5A