

DUPLEXERS - ISO-PLEXERS


UHF 300 - 512 MHz

ELECTRICAL SPECIFICATIONS



Model Number	Contact Factory (623) 581-2875	65334/ENCI-1	65434/ENCI-1	65534/ENCI-1	65434/ENCI-2	65534/ENCI-2
Frequency Band (MHz)	300-375	440-512	440-512	440-512	440-512	440-512
Input Power	↑	20 W	50 W	100 W	50 W	100 W
Spacing Min Space vs Loss Max Loss		5.0 MHz 1.5 dB	5.0 MHz 1.5 dB	5.0 MHz 1.5 dB	5.0 MHz 1.7 dB	5.0 MHz 1.7 dB
Spacing Max Space vs Loss Min Loss		30 MHz 1.1 dB	30 MHz 1.1 dB	30 MHz 1.1 dB	30 MHz 1.3 dB	30 MHz 1.3 dB
Isolation (TX/RX) (Ant/TX)		80+ dB 35+ dB	80+ dB 35+ dB	80+ dB 35+ dB	80+ dB 70+ dB	80+ dB 70+ dB
Isolator Stages		Single	Single	Single	Dual	Dual
List Price		\$1,183.00	\$1,265.00	\$1,320.00	\$1,584.00	\$1,667.00

MECHANICAL SPECIFICATIONS


Dimension (HxWxD) (Max.)		7 x 19 x 10 3/4 178 x 483 x 274	7 x 19 x 10 3/4 178 x 483 x 274	7 x 19 x 10 3/4 178 x 483 x 274	7 x 19 x 10 3/4 178 x 483 x 274	7 x 19 x 10 3/4 178 x 483 x 274
Connectors		N Female	N Female	N Female	N Female	N Female
Finish		Chem Film	Chem Film	Chem Film	Chem Film	Chem Film
Ship Weight: lbs. kg.		9 4.1	9 4.1	10 4.6	10 4.6	9 4.1

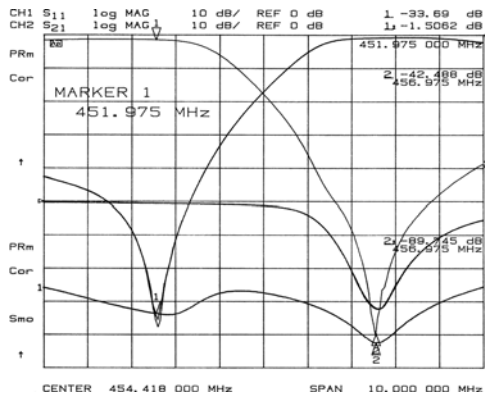

65534/ENCI-1

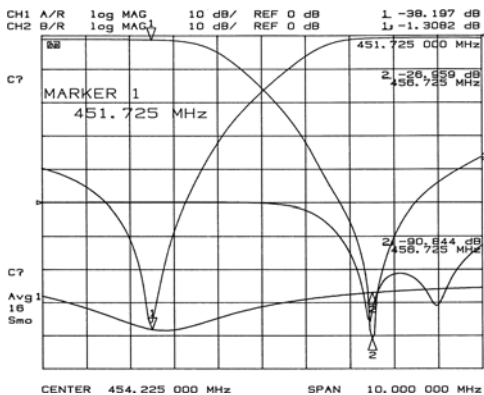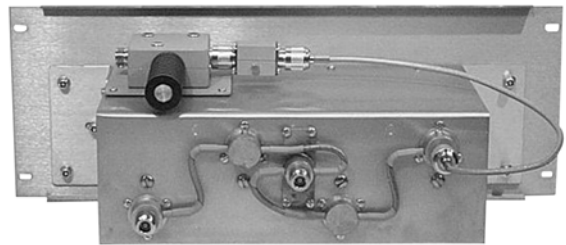

65534/ENCI-2

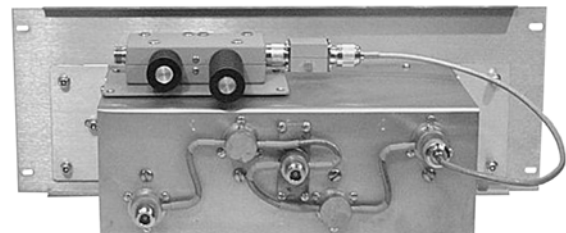

PASS NOTCH