

DUPLIXERS - ISO-PLEXERS

UHF 440 - 806 MHz


ELECTRICAL SPECIFICATIONS

Model Number	65346/SNCI-1	65446/SNCI-1	65546/SNCI-1	65446/SNCI-2	65546/SNCI-2	Contact Factory (623) 581-2875
Frequency Band (MHz)	440-512	440-512	440-512	440-512	440-512	512-806
Input Power	20 W	50 W	125 W	50 W	125 W	↑
Spacing vs Loss	Min Space 2.0 MHz Max Loss 2.1 dB	2.0 MHz 2.1 dB	2.0 MHz 2.1 dB	2.0 MHz 2.3 dB	2.0 MHz 2.3 dB	
Spacing vs Loss	Max Space 30 MHz Min Loss 1.5 dB	30 MHz 1.5 dB	30 MHz 1.5 dB	30 MHz 1.6 dB	30 MHz 1.6 dB	
Isolation (TX/RX) (Ant/TX)	90+ dB 35+ dB	90+ dB 35+ dB	90+ dB 35+ dB	90+ dB 70+ dB	90+ dB 70+ dB	
Isolator Stages	Single	Single	Single	Dual	Dual	
List Price	\$2,178.00	\$2,374.00	\$2,426.00	\$2,687.00	\$2,767.00	



MECHANICAL SPECIFICATIONS

Dimension (HxWxD) (Max.)	8 3/4 x 19 x 19 223 x 483 x 483	8 3/4 x 19 x 19 223 x 483 x 483	8 3/4 x 19 x 19 223 x 483 x 483	8 3/4 x 19 x 19 223 x 483 x 483	8 3/4 x 19 x 19 223 x 483 x 483	
Connectors	N Female	N Female	N Female	N Female	N Female	
Finish	EMR Gray	EMR Gray	EMR Gray	EMR Gray	EMR Gray	
Ship Weight: lbs. kg.	35 15.9	35 15.9	35 15.9	36 16.4	36 16.4	

65546/SNCI-1

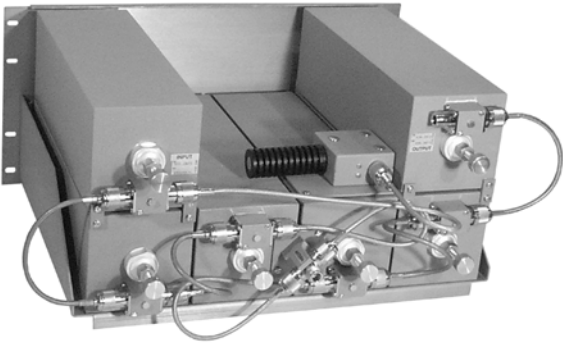

65546/SNCI-2

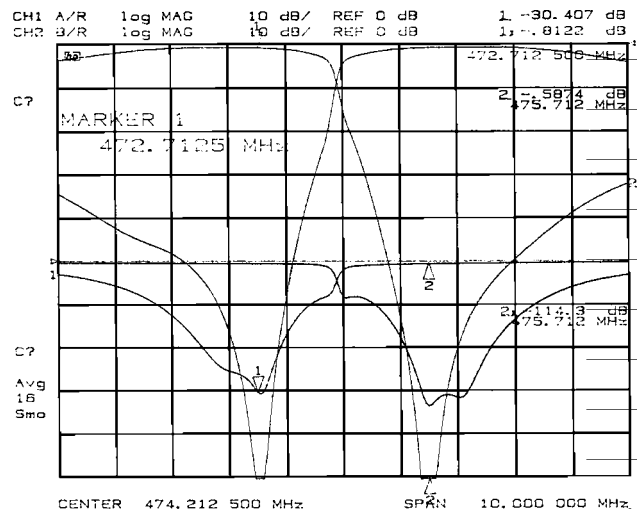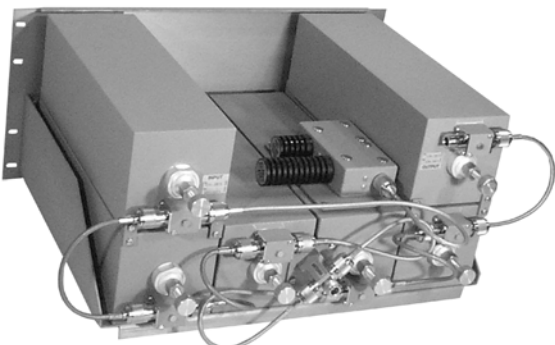

PASS NOTCH