

DUPLXERS - ISO-PLEXERS

UHF 894 - 960 MHz


ELECTRICAL SPECIFICATIONS

Model Number	66436/ENDI-1	66536/ENDI-1	66436/ENDI-2	66536/ENDI-2
Frequency Band (MHz)	894-960	894-960	894-960	894-960
Input Power	50 W	100 W	50 W	100 W
Spacing vs Loss	Min Space 3.6 MHz Max Loss 2.8 dB	3.6 MHz 2.8 dB	3.6 MHz 2.9 dB	3.6 MHz 2.9 dB
Spacing vs Loss	Max Space 36 MHz Min Loss 1.8 dB	36 MHz 1.8 dB	36 MHz 2.0 dB	36 MHz 2.0 dB
Isolation (TX/RX) (Ant/TX)	80+ dB 35+ dB	80+ dB 35+ dB	80+ dB 70+ dB	80+ dB 70+ dB
Isolator Stages	Single	Single	Dual	Dual
List Price	\$1,422.00	\$1,473.00	\$1,751.00	\$1,802.00



MECHANICAL SPECIFICATIONS

Dimension (HxWxD) (Max.)	5 1/4 x 19 x 7 3/8 134 x 483 x 188	5 1/4 x 19 x 7 3/8 134 x 483 x 188	5 1/4 x 19 x 7 3/8 134 x 483 x 188	5 1/4 x 19 x 7 3/8 134 x 483 x 188
Connectors	N Female	N Female	N Female	N Female
Finish	Chem Film	Chem Film	Chem Film	Chem Film
Ship Weight: lbs. kg.	9 4.1	9 4.1	10 4.6	10 4.6

66536/ENDI-1

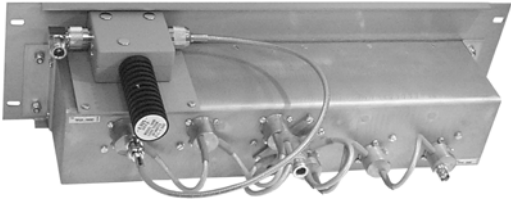

66536/ENDI-2

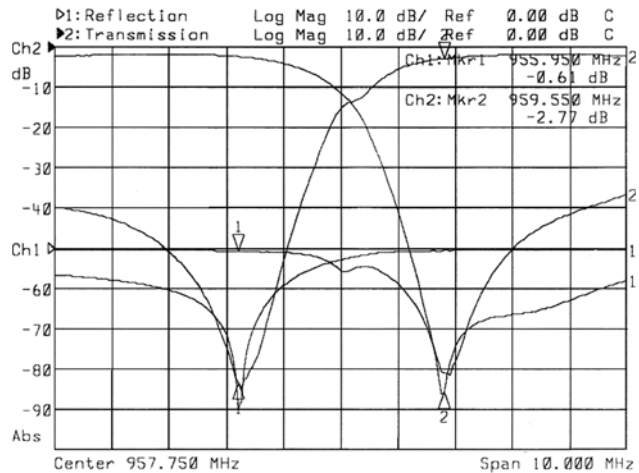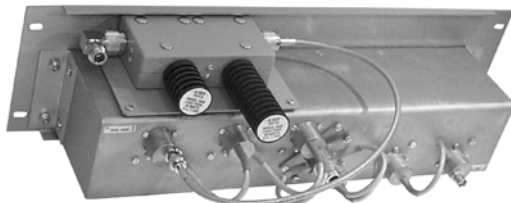

DUPLEXERS - ISO-PLEXERS


UHF 894 - 960 MHz

ELECTRICAL SPECIFICATIONS



Model Number	66444/SNDI-1	66544/SNDI-1	66444/SNDI-2	66544/SNDI-2
Frequency Band (MHz)	894-960	894-960	894-960	894-960
Input Power	50 W	125 W	50 W	125 W
Spacing vs Loss	Min Space 3.6 MHz Max Loss 1.5 dB	3.6 MHz 1.5 dB	3.6 MHz 1.7 dB	3.6 MHz 1.7 dB
Spacing vs Loss	Max Space 36 MHz Min Loss 1.1 dB	36 MHz 1.1 dB	36 MHz 1.3 dB	36 MHz 1.3 dB
Isolation (TX/RX) (Ant/TX)	85+ dB 35+ dB	85+ dB 35+ dB	85+ dB 70+ dB	85+ dB 70+ dB
Isolator Stages	Single	Single	Dual	Dual
List Price	\$1,617.00	\$1,670.00	\$1,947.00	\$1,999.00

MECHANICAL SPECIFICATIONS


Dimension (HxWxD) (Max.)	7 x 19 x 10 178 x 483 x 254	7 x 19 x 10 178 x 483 x 254	7 x 19 x 10 178 x 483 x 254	7 x 19 x 10 178 x 483 x 254
Connectors	N Female	N Female	N Female	N Female
Finish	EMR Gray	EMR Gray	EMR Gray	EMR Gray
Ship Weight: lbs. kg.	14 6.4	14 6.4	15 6.9	15 6.9

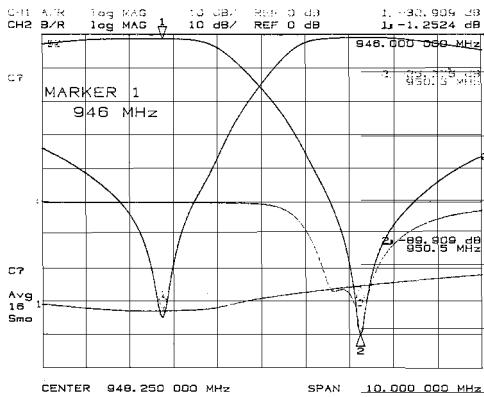

66544/SNDI-1

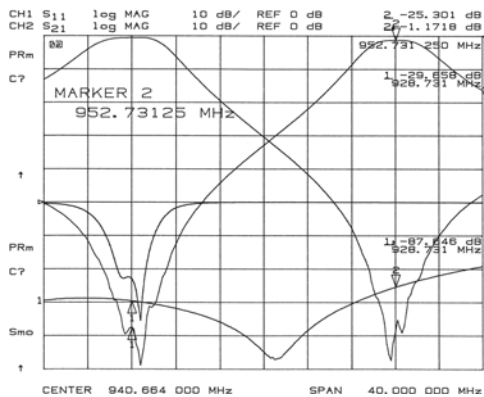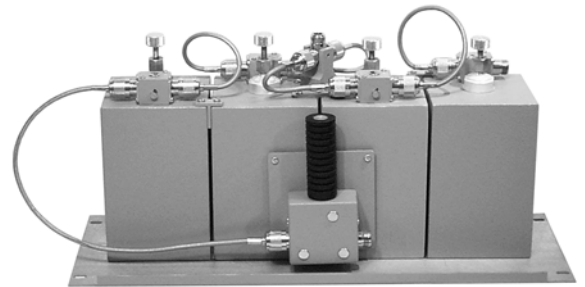

66544/SNDI-2

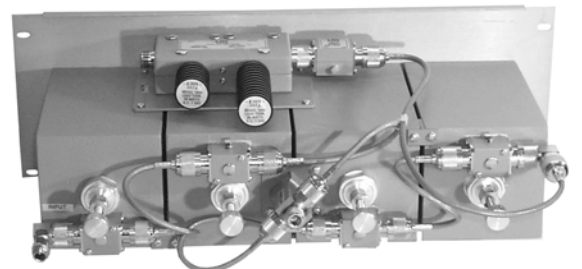

PASS NOTCH