

ELECTRICAL SPECIFICATIONS

Model Number	63316-1/MD	64316-0/MC	64316-1/MC	64316-1/MD	64316-1/ME
Frequency Band (MHz)	66-88	138-174	138-174	174-240	240-300
Input Power	40 W	40 W	40 W	40 W	40 W
Spacing vs Loss	Min Space 5.0 MHz Max Loss 1.2 dB	5.0 MHz 1.2 dB	5.0 MHz 1.2 dB	5.5 MHz 1.2 dB	5.0 MHz 1.2 dB
Spacing vs Loss	Max Space 10 MHz Min Loss 1.0 dB	15 MHz 1.0 dB	15 MHz 1.0 dB	15 MHz 1.0 dB	15 MHz 1.0 dB
Isolation Type	Min 70+ dB Type 75 dB	70+ dB 75 dB	70+ dB 75 dB	70+ dB 75 dB	70+ dB 75 dB
List Price	\$300.00	\$300.00	\$300.00	\$300.00	\$300.00

MECHANICAL SPECIFICATIONS


Dim (HxWxD)	Inches	1 3/8 x 6 1/8 x 10 1/2	1 3/8 x 6 1/8 x 8 1/2	1 3/8 x 6 1/8 x 8 1/2	1 3/8 x 6 1/8 x 5 1/2	1 3/8 x 6 1/8 x 5 1/2
	Metric	35 x 156 x 267	35 x 156 x 216	35 x 156 x 216	35 x 156 x 140	35 x 156 x 140
Connectors		BNC F	N FEM	BNC F	BNC F	BNC F
Finish		Black	Black	Black	Black	Black
Ship Weight: lbs.		3	3	3	3	3
kg.		1.4	1.4	1.4	1.4	1.4




64316-1/MC




64316-0/MC

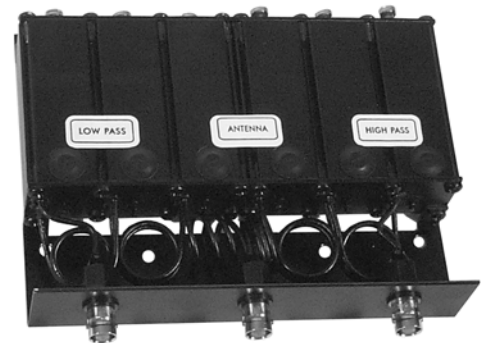

64316-1/MD (No Plot Shown)
64316-1/ME

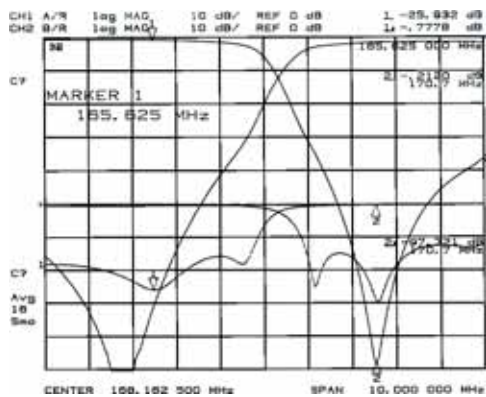

64316-1/MC & 64316-0/MC

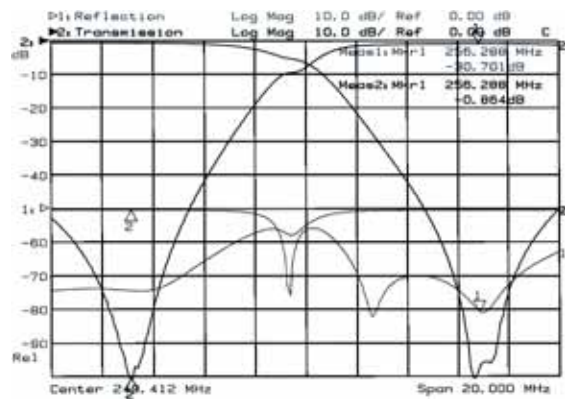

64316-1/ME