


# INTERMODULATION CONTROL DEVICES

## 650 - 1000 MHz


Model No. List Price	Frequency	Isolator Stage	Pwr: Input Refl	Bandwidth: Fixed	Insertion Loss	Isolation	Load Termination	Actual Dimensions Inches Metric	Ship Wt. lbs kg.
76412 \$545.00	650-1000	Single	30 W 15 W	See Page 41 Figure 1 & 2	0.40 dB	35+ dB	15 W	3 1/2 x 19 x 4 3/4 89 x 483 x 121	3 1.4
76413 \$560.00	650-1000	Single	50 W 30 W	See Page 41 Figure 1 & 2	0.40 dB	35+ dB	30 W	3 1/2 x 19 x 4 3/4 89 x 483 x 121	3 1.4
76414 \$590.00	650-1000	Single	50 W 50 W	See Page 41 Figure 1 & 2	0.40 dB	35+ dB	60 W	3 1/2 x 19 x 6 1/4 89 x 483 x 159	5 2.3
76514 \$610.00	650-1000	Single	125 W 60 W	See Page 41 Figure 1 & 2	0.40 dB	35+ dB	60 W	3 1/2 x 19 x 6 1/4 89 x 483 x 159	5 2.3
76514A \$630.00	650-1000	Single	125 W 75 W	See Page 41 Figure 1 & 2	0.40 dB	35+ dB	75 W	3 1/2 x 19 x 7 5/8 89 x 483 x 194	4 1.9
76515 \$830.00	650-1000	Single	125 W 125 W	See Page 41 Figure 1 & 2	0.40 dB	35+ dB	125 W	3 1/2 x 19 x 10 1/4 89 x 483 x 261	7 3.2
76514A/H \$690.00	650-1000	Single	150 W 75 W	See Page 41 Figure 1 & 2	0.40 dB	35+ dB	75 W	3 1/2 x 19 x 7 5/8 89 x 483 x 194	5 2.3
76515A/H \$945.00	650-1000	Single	150 W 150 W	See Page 41 Figure 1 & 2	0.40 dB	35+ dB	150 W	5 1/4 x 19 x 11 1/2 134 x 483 x 293	10 4.6




76412




76413

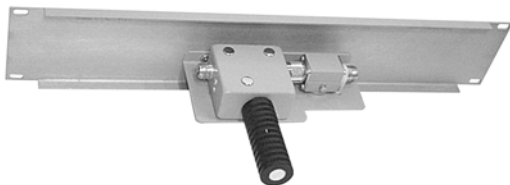


76414

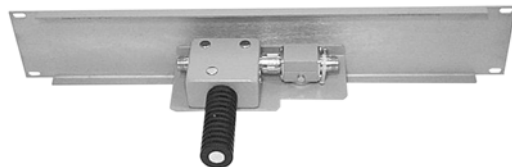


76514

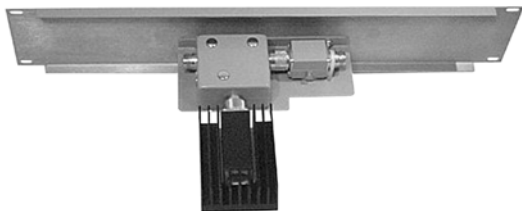


76514A

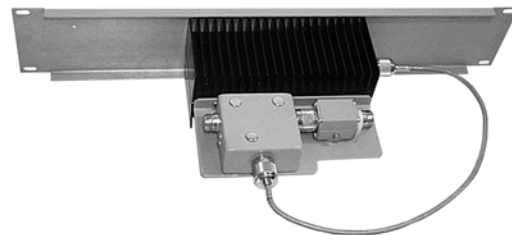

76515

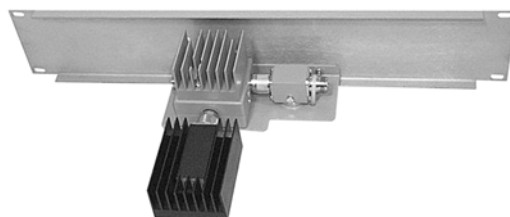

76514A/H

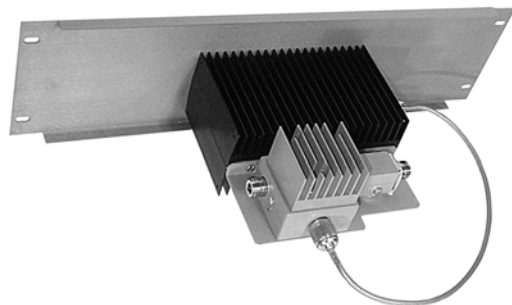


76515A/H


# INTERMODULATION CONTROL DEVICES

## 650 - 1000 MHz


Model No. List Price	Frequency	Isolator Stage	Pwr: Input Refl	Bandwidth: Fixed	Insertion Loss	Isolation	Load Termination	Actual Dimensions Inches Metric	Ship Wt. lbs kg.
76615 \$1,095.00	650-1000	Single	200 W 125 W	See Page 41 Figure 3 & 4	0.40 dB	35+ dB	125 W	5 1/4 x 19 x 5 134 x 483 x 127	8 3.7
76616 \$1,295.00	650-1000	Single	200 W 200 W	See Page 41 Figure 3 & 4	0.40 dB	35+ dB	250 W	8 3/4 x 19 x 5 223 x 483 x 127	12 5.5
76615/H \$1,155.00	650-1000	Single	250 W 125 W	See Page 41 Figure 3 & 4	0.40 dB	35+ dB	125 W	5 1/4 x 19 x 9 1/4 134 x 483 x 235	7 3.2
76616/H \$1,355.00	650-1000	Single	250 W 250 W	See Page 41 Figure 3 & 4	0.40 dB	35+ dB	250 W	8 3/4 x 19 x 9 1/4 223 x 483 x 235	12 5.5
76615/HF \$1,440.00	650-1000	Single	250 W 125 W	See Page 41 Figure 3 & 4	0.40 dB	35+ dB	125 W	8 3/4 x 19 x 10 3/4 223 x 483 x 274	10 4.6
76616/HF \$1,640.00	650-1000	Single	250 W 250 W	See Page 41 Figure 3 & 4	0.40 dB	35+ dB	250 W	10 1/2 x 19 x 10 3/4 267 x 483 x 274	14 6.4

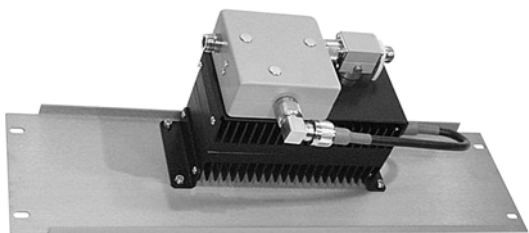


76615

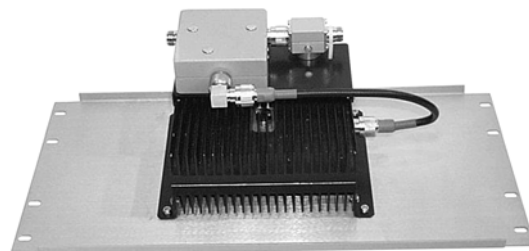


76616

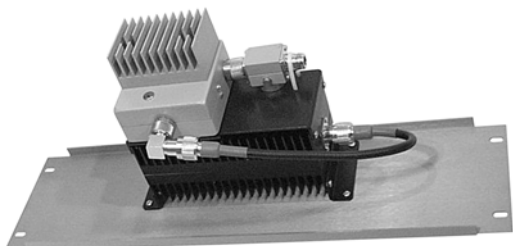


76615/H

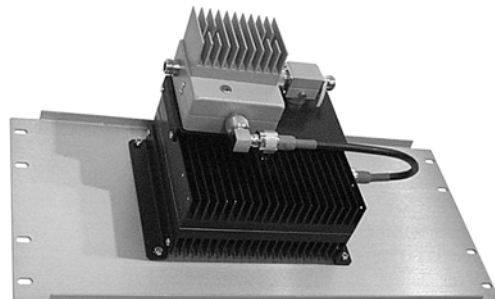

76616/H

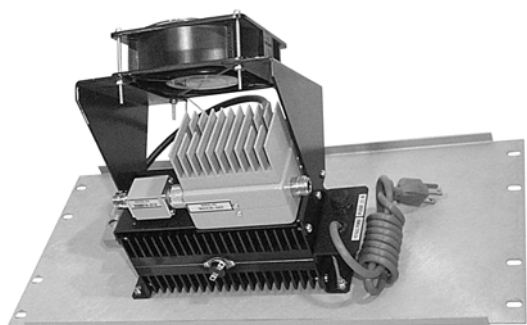

76615/HF

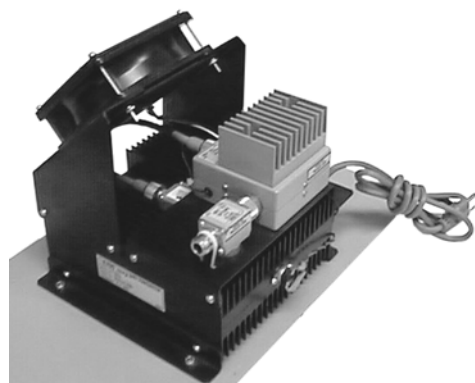

76616/HF

# INTERMODULATION CONTROL DEVICES

## 650 - 1000 MHz


Model No. List Price	Frequency	Isolator Stage	Pwr: Input Refl	Bandwidth: Fixed	Insertion Loss	Isolation	Load Termination	Actual Dimensions Inches Metric	Ship Wt. lbs kg.
76422 \$840.00	650-1000	Dual	30 W 15 W	See Page 44 Figure 1 & 2	0.60 dB	70+ dB	15/15 W	3 1/2 x 19 x 5 89 x 483 x 127	4 1.9
76423 \$860.00	650-1000	Dual	50 W 30 W	See Page 44 Figure 1 & 2	0.60 dB	70+ dB	15/30 W	3 1/2 x 19 x 5 89 x 483 x 127	4 1.9
76424 \$905.00	650-1000	Dual	50 W 50 W	See Page 44 Figure 1 & 2	0.60 dB	70+ dB	30/60 W	3 1/2 x 19 x 6 89 x 483 x 153	4 1.9
76524 \$935.00	650-1000	Dual	125 W 60 W	See Page 44 Figure 1 & 2	0.60 dB	70+ dB	30/60 W	3 1/2 x 19 x 6 89 x 483 x 153	4 1.9
76524A \$955.00	650-1000	Dual	125 W 75 W	See Page 44 Figure 1 & 2	0.60 dB	70+ dB	30/75 W	3 1/2 x 19 x 7 89 x 483 x 178	5 2.3
76525 \$1,150.00	650-1000	Dual	125 W 125 W	See Page 44 Figure 1 & 2	0.60 dB	70+ dB	60/125 W	3 1/2 x 19 x 9 3/4 89 x 483 x 248	8 3.7
76524A/H \$1,015.00	650-1000	Dual	150 W 75 W	See Page 44 Figure 1 & 2	0.60 dB	70+ dB	30/75 W	3 1/2 x 19 x 7 1/2 89 x 483 x 191	5 2.3
76525A/H \$1,300.00	650-1000	Dual	150 W 150 W	See Page 44 Figure 1 & 2	0.60 dB	70+ dB	60/150 W	3 1/2 x 19 x 10 3/4 89 x 483 x 274	9 4.1




76422




76423

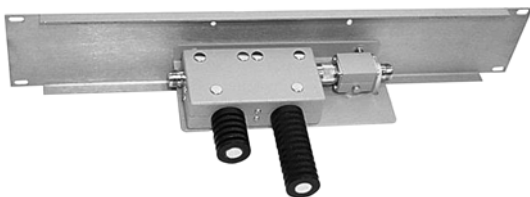


76424

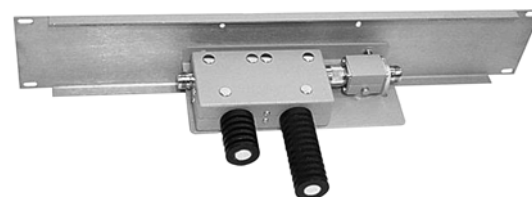


76524

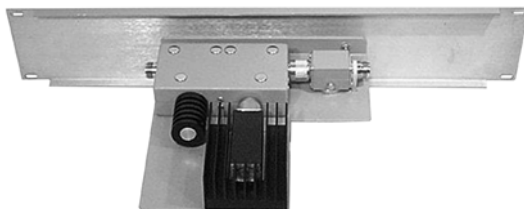


76524A

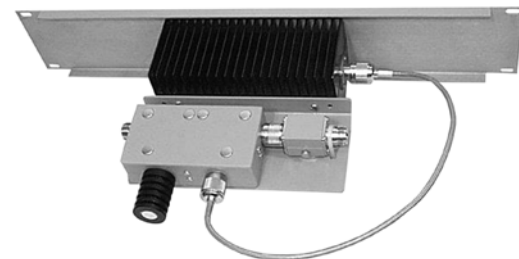

76525

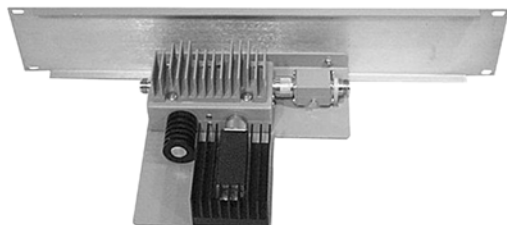

76524A/H

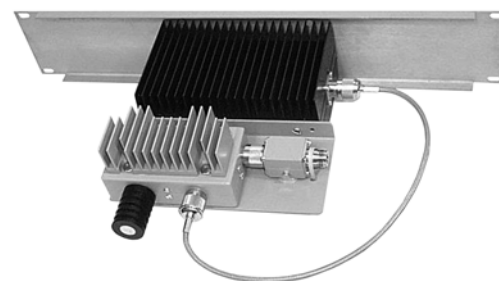


76525A/H


# INTERMODULATION CONTROL DEVICES

## 650 - 1000 MHz


Model No. List Price	Frequency	Isolator Stage	Pwr: Input Refl	Bandwidth: Fixed	Insertion Loss	Isolation	Load Termination	Actual Dimensions Inches Metric	Ship Wt. lbs kg.
76625 \$1,815.00	650-1000	Dual	200 W 125 W	Contact Factory	0.60 dB	70+ dB	60/125 W	8 3/4 x 19 x 9 3/4 223 x 483 x 248	8 3.7
76626 \$1,990.00	650-1000	Dual	200 W 200 W	Contact Factory	0.60 dB	70+ dB	60/250 W	8 3/4 x 19 x 5 223 x 483 x 127	11 5.0
76625/H \$1,860.00	650-1000	Dual	250 W 125 W	Contact Factory	0.60 dB	70+ dB	60/125 W	8 3/4 x 19 x 9 3/4 223 x 483 x 248	8 3.7
76626/H \$2,040.00	650-1000	Dual	250 W 250 W	Contact Factory	0.60 dB	70+ dB	60/250 W	8 3/4 x 19 x 6 1/2 223 x 483 x 166	11 5.0
76625/HF \$2,025.00	650-1000	Dual	250 W 125 W	Contact Factory	0.60 dB	70+ dB	60/125 W	8 3/4 x 19 x 9 1/4 223 x 483 x 235	11 5.0
76626/HF \$2,195.00	650-1000	Dual	250 W 250 W	Contact Factory	0.60 dB	70+ dB	60/250 W	10 1/2 x 19 x 8 1/4 267 x 483 x 210	16 7.3

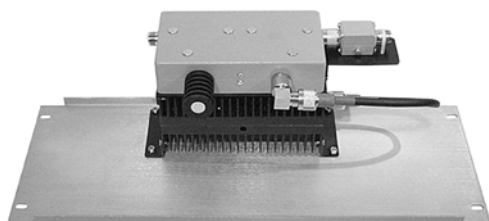


76625

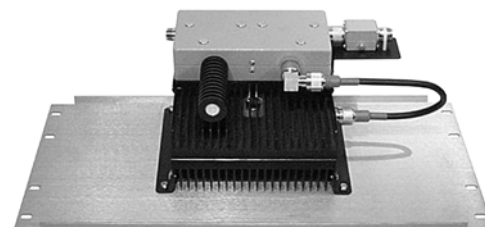


76626

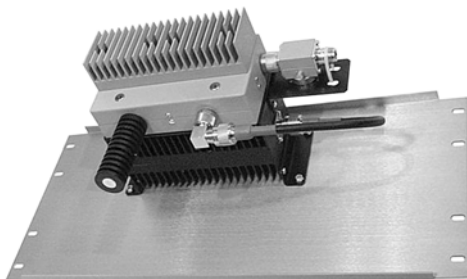


76625/H

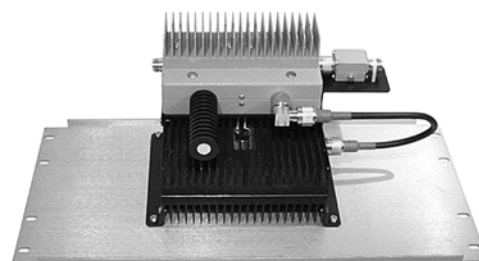

76626/H

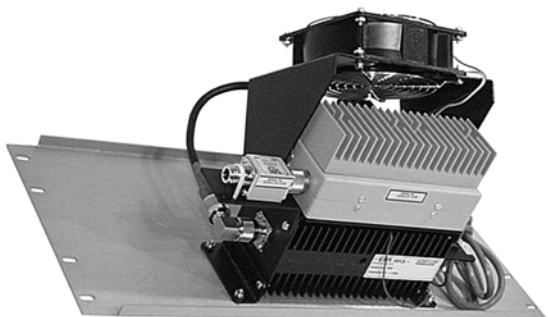

76625/HF

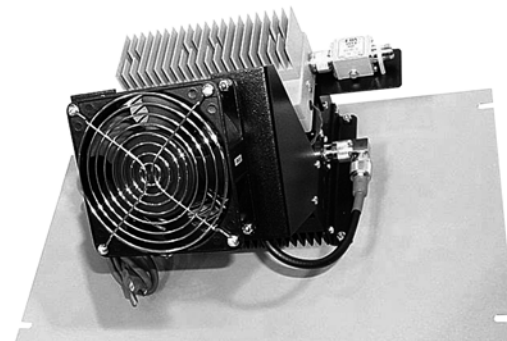

76626/HF