

# MULTICOUPLERS 800 & 900 SMR TRUNKING

## ELECTRICAL SPECIFICATIONS

Model Number	96104-1/P-5C	96104-0/P-5C	96108-1/P-5C	96108-0/P-5C
Frequency Band (MHz)	806-894	806-894	806-894	806-894
# of Channels	3-4	3-4	5-8	5-8
Pass Band	3-15 MHz	3-15 MHz	3-15 MHz	3-15 MHz
# of Resonators	5	5	5	5
Rx/Rx Isolation	23+ dB	23+ dB	23+ dB	23+ dB
System Voltage	115 VAC	115 VAC	115 VAC	115 VAC
Amplifier Gain	+28 dB	+28 dB	+28 dB	+28 dB
Amplifier Type	Bipolar	Bipolar	Bipolar	Bipolar
Amplifier Noise Figure	3.0 dB	3.0 dB	3.0 dB	3.0 dB
Amplifier 3rd Order IP	+42 dBm	+42 dBm	+42 dBm	+42 dBm
Amplifier 1 dB Comp	+21 dBm	+21 dBm	+21 dBm	+21 dBm
Amplifier Bias Voltage	13.6 VDC	13.6 VDC	13.6 VDC	13.6 VDC
Amplifier Current Draw	200 mA	200 mA	200 mA	200 mA
System NF (typ.)	5.0 dB	5.0 dB	5.0 dB	5.0 dB
Nominal Impedance	50 $\Omega$	50 $\Omega$	50 $\Omega$	50 $\Omega$
Max. VSWR @ Resonance	1.25:1	1.25:1	1.25:1	1.25:1
Temperature Range	- 22 to +140 °F - 30 to +60 ° C	- 22 to +140 °F - 30 to +60 ° C	- 22 to +140 °F - 30 to +60 ° C	- 22 to +140 °F - 30 to +60 ° C
List Price	\$3,485.00	\$3,530.00	\$3,685.00	\$3,785.00

## MECHANICAL SPECIFICATIONS


Dimensions: Inches	18 3/4 x 12 x 8	18 3/4 x 12 x 8	18 3/4 x 12 x 8	18 3/4 x 12 x 8
Nema Box Metric	477 x 305 x 204	477 x 305 x 204	477 x 305 x 204	477 x 305 x 204
Dimensions: Inches	3 1/2 x 19 x 10	3 1/2 x 19 x 10	3 1/2 x 19 x 10	3 1/2 x 19 x 10
Multi. Tray Metric	89 x 483 x 254	89 x 483 x 254	89 x 483 x 254	89 x 483 x 254
Connectors: Input	N	N	N	N
Output	BNC	N	BNC	N
Ship Weight: lbs.	40	40	40	40
kg.	18.1	18.1	18.1	18.1




96104-1/P-5C



96108-0/P-5C

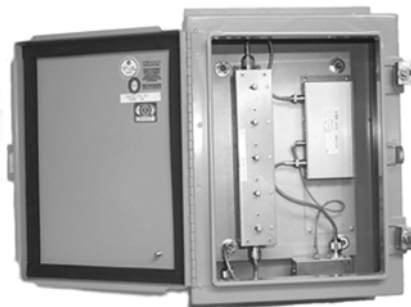

Nema Box for all models on this page.

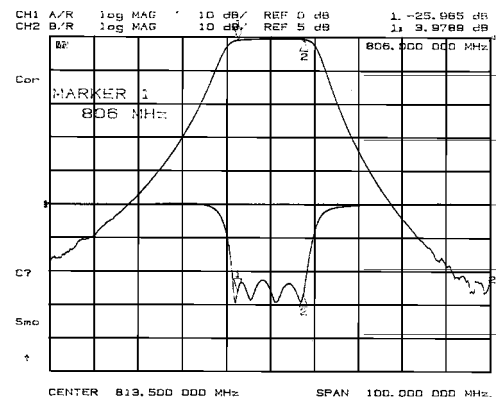

RECEIVER MULTICOUPLER - TOWER TOP



# MULTICOUPLERS 800 & 900 SMR TRUNKING

## ELECTRICAL SPECIFICATIONS

Model Number	96112-1/P-5C	96112-0/P-5C	96116-1/P-5C	96116-0/P-5C
Frequency Band (MHz)	806-894	806-894	806-894	806-894
# of Channels	9-12	9-12	13-16	13-16
Pass Band	3-15 MHz	3-15 MHz	3-15 MHz	3-15 MHz
# of Resonators	5	5	5	5
Rx/Rx Isolation	23+ dB	23+ dB	23+ dB	23+ dB
System Voltage	115 VAC	115 VAC	115 VAC	115 VAC
Amplifier Gain	+28 dB	+28 dB	+28 dB	+28 dB
Amplifier Type	Bipolar	Bipolar	Bipolar	Bipolar
Amplifier Noise Figure	3.0 dB	3.0 dB	3.0 dB	3.0 dB
Amplifier 3rd Order IP	+42 dBm	+42 dBm	+42 dBm	+42 dBm
Amplifier 1 dB Comp	+21 dBm	+21 dBm	+21 dBm	+21 dBm
Amplifier Bias Voltage	13.6 VDC	13.6 VDC	13.6 VDC	13.6 VDC
Amplifier Current Draw	200 mA	200 mA	200 mA	200 mA
System NF (typ.)	5.0 dB	5.0 dB	5.0 dB	5.0 dB
Nominal Impedance	50 Ω	50 Ω	50 Ω	50 Ω
Max. VSWR @ Resonance	1.25:1	1.25:1	1.25:1	1.25:1
Temperature Range	- 22 to +140 °F - 30 to +60 ° C	- 22 to +140 °F - 30 to +60 ° C	- 22 to +140 °F - 30 to +60 ° C	- 22 to +140 °F - 30 to +60 ° C
List Price	\$4,115.00	\$4,325.00	\$4,225.00	\$4,465.00

## MECHANICAL SPECIFICATIONS

Dimensions: Inches	18 3/4 x 12 x 8	18 3/4 x 12 x 8	18 3/4 x 12 x 8	18 3/4 x 12 x 8
Nema Box Metric	477 x 305 x 204	477 x 305 x 204	477 x 305 x 204	477 x 305 x 204
Dimensions: Inches	7 x 19 x 10	7 x 19 x 10	7 x 19 x 10	7 x 19 x 10
Multi. Tray Metric	178 x 483 x 254	178 x 483 x 254	178 x 483 x 254	178 x 483 x 254
Connectors: Input	N	N	N	N
Output	BNC	N	BNC	N
Ship Weight: lbs.	43	43	44	44
kg.	19.6	19.6	20.0	20.0

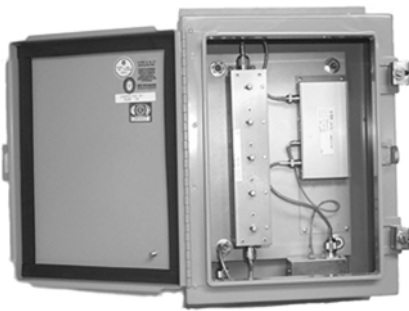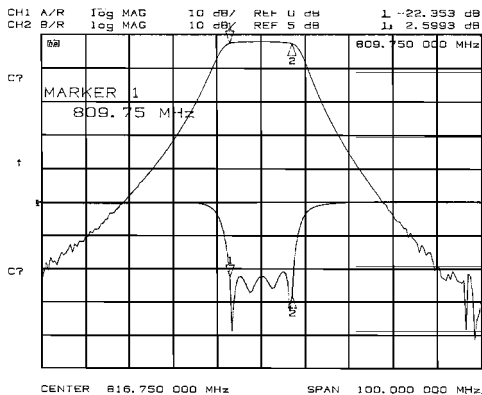

Nema Box for all models on this page.



96112-0/P-5C



96116-1/P-5C

RECEIVER MULTICOUPLER - TOWER TOP

# MULTICOUPLERS

## 800 & 900 SMR TRUNKING

RECEIVER MULTICOUPLER - TOWER TOP

### ELECTRICAL SPECIFICATIONS

Model Number	96124-1/P-5C	96124-0/P-5C	96132-1/P-5C	96132-0/P-5C
Frequency Band (MHz)	806-894	806-894	806-894	806-894
# of Channels	17-24	17-24	25-32	25-32
Pass Band	3-15 MHz	3-15 MHz	3-15 MHz	3-15 MHz
# of Resonators	5	5	5	5
Rx/Rx Isolation	23+ dB	23+ dB	23+ dB	23+ dB
System Voltage	115 VAC	115 VAC	115 VAC	115 VAC
Amplifier Gain	+28 dB	+28 dB	+28 dB	+28 dB
Amplifier Type	Bipolar	Bipolar	Bipolar	Bipolar
Amplifier Noise Figure	3.0 dB	3.0 dB	3.0 dB	3.0 dB
Amplifier 3rd Order IP	+42 dBm	+42 dBm	+42 dBm	+42 dBm
Amplifier 1 dB Comp	+21 dBm	+21 dBm	+21 dBm	+21 dBm
Amplifier Bias Voltage	13.6 VDC	13.6 VDC	13.6 VDC	13.6 VDC
Amplifier Current Draw	200 mA	200 mA	200 mA	200 mA
System NF (typ.)	5.0 dB	5.0 dB	5.0 dB	5.0 dB
Nominal Impedance	50 $\Omega$	50 $\Omega$	50 $\Omega$	50 $\Omega$
Max. VSWR @ Resonance	1.25:1	1.25:1	1.25:1	1.25:1
Temperature Range	- 22 to +140 °F - 30 to +60 °C	- 22 to +140 °F - 30 to +60 °C	- 22 to +140 °F - 30 to +60 °C	- 22 to +140 °F - 30 to +60 °C
List Price	\$4,785.00	\$5,025.00	\$5,245.00	\$5,695.00


### MECHANICAL SPECIFICATIONS

Dimensions: Inches	18 3/4 x 12 x 8	18 3/4 x 12 x 8	18 3/4 x 12 x 8	18 3/4 x 12 x 8
Nema Box Metric	477 x 305 x 204	477 x 305 x 204	477 x 305 x 204	477 x 305 x 204
Dimensions: Inches	10 1/2 x 19 x 10	11 3/4 x 19 x 10	10 1/2 x 19 x 10	11 3/4 x 19 x 10
Multi. Tray Metric	267 x 19 x 10	299 x 483 x 254	267 x 483 x 254	299 x 483 x 254
Connectors: Input	N	N	N	N
Output	BNC	N	BNC	N
Ship Weight: lbs.	48	49	52	54
kg.	21.8	22.3	23.6	24.5


96124-0/P-5C



96132-0/P-5C

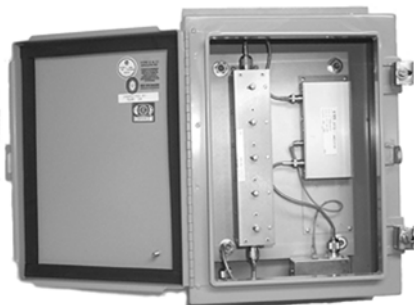

Nema Box for all models on this page.

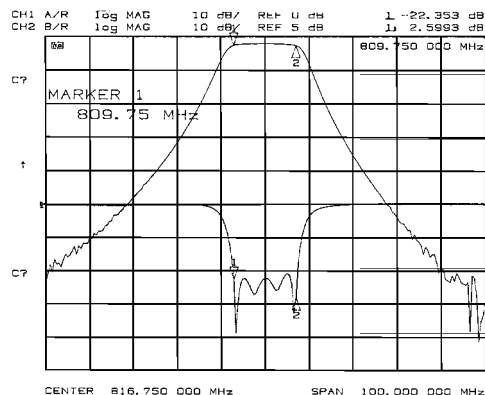

# MULTICOUPLERS 800 & 900 SMR TRUNKING

## ELECTRICAL SPECIFICATIONS



Model Number	96148-1/P-5C	96148-0/P-5C	96164-1/P-5C	96164-0/P-5C
Frequency Band (MHz)	806-894	806-894	806-894	806-894
# of Channels	33-48	33-48	49-64	49-64
Pass Band	3-15 MHz	3-15 MHz	3-15 MHz	3-15 MHz
# of Resonators	5	5	5	5
Rx/Rx Isolation	23+ dB	23+ dB	23+ dB	23+ dB
System Voltage	115 VAC	115 VAC	115 VAC	115 VAC
Amplifier Gain	+28 dB	+28 dB	+28 dB	+28 dB
Amplifier Type	Bipolar	Bipolar	Bipolar	Bipolar
Amplifier Noise Figure	3.0 dB	3.0 dB	3.0 dB	3.0 dB
Amplifier 3rd Order IP	+42 dBm	+42 dBm	+42 dBm	+42 dBm
Amplifier 1 dB Comp	+21 dBm	+21 dBm	+21 dBm	+21 dBm
Amplifier Bias Voltage	13.6 VDC	13.6 VDC	13.6 VDC	13.6 VDC
Amplifier Current Draw	200 mA	200 mA	200 mA	200 mA
System NF (typ.)	5.0 dB	5.0 dB	5.0 dB	5.0 dB
Nominal Impedance	50 $\Omega$	50 $\Omega$	50 $\Omega$	50 $\Omega$
Max. VSWR @ Resonance	1.25:1	1.25:1	1.25:1	1.25:1
Temperature Range	- 22 to +140 °F - 30 to +60 ° C	- 22 to +140 °F - 30 to +60 ° C	- 22 to +140 °F - 30 to +60 ° C	- 22 to +140 °F - 30 to +60 ° C
List Price	\$6,480.00	\$7,190.00	\$7,380.00	\$8,185.00

## MECHANICAL SPECIFICATIONS

Dimensions: Inches	18 3/4 x 12 x 8	18 3/4 x 12 x 8	18 3/4 x 12 x 8	18 3/4 x 12 x 8
Nema Box Metric	477 x 305 x 204	477 x 305 x 204	477 x 305 x 204	477 x 305 x 204
Dimensions: Inches	14 x 19 x 10	14 x 19 x 10	17 1/2 x 19 x 10	18 3/4 x 19 x 10
Multi. Tray Metric	356 x 483 x 254	356 x 483 x 254	445 x 483 x 254	477 x 483 x 254
Connectors: Input	N	N	N	N
Output	BNC	N	BNC	N
Ship Weight: lbs.	56	59	60	64
kg.	25.5	26.8	28.2	29.1



96148-1/P-5C

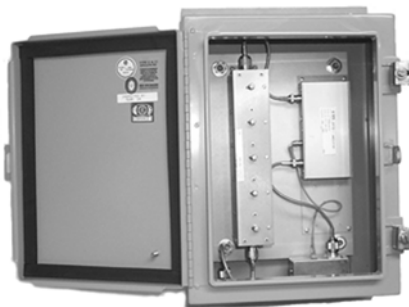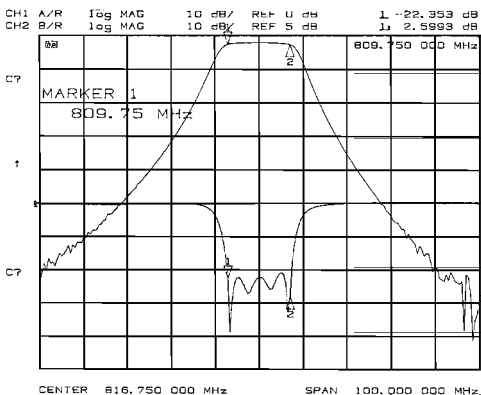

Nema Box for all models on this page.



96164-0/P-5C

RECEIVER MULTICOUPLER - TOWER TOP


# MULTICOUPLERS 800 & 900 SMR TRUNKING

## ELECTRICAL SPECIFICATIONS


Model Number	96104-1/P-5D	96104-0/P-5D	96108-1/P-5D	96108-0/P-5D
Frequency Band (MHz)	894-960	894-960	894-960	894-960
# of Channels	3-4	3-4	5-8	5-8
Pass Band	3-15 MHz	3-15 MHz	3-15 MHz	3-15 MHz
# of Resonators	5	5	5	5
Rx/Rx Isolation	+23 dB	+23 dB	+23 dB	+23 dB
System Voltage	115 VAC	115 VAC	115 VAC	115 VAC
Amplifier Gain	+28 dB	+28 dB	+28 dB	+28 dB
Amplifier Type	Bipolar	Bipolar	Bipolar	Bipolar
Amplifier Noise Figure	3.0 dB	3.0 dB	3.0 dB	3.0 dB
Amplifier 3rd Order IP	+42 dBm	+42 dBm	+42 dBm	+42 dBm
Amplifier 1 dB Comp	+21 dBm	+21 dBm	+21 dBm	+21 dBm
Amplifier Bias Voltage	13.6 VDC	13.6 VDC	13.6 VDC	13.6 VDC
Amplifier Current Draw	200 mA	200 mA	200 mA	200 mA
System NF (typ.)	5.0 dB	5.0 dB	5.0 dB	5.0 dB
Nominal Impedance	50 Ω	50 Ω	50 Ω	50 Ω
Max. VSWR @ Resonance	1.25:1	1.25:1	1.25:1	1.25:1
Temperature Range	- 22 to +140 °F - 30 to +60 ° C	- 22 to +140 °F - 30 to +60 ° C	- 22 to +140 °F - 30 to +60 ° C	- 22 to +140 °F - 30 to +60 ° C
List Price	\$3,470.00	\$3,530.00	\$3,685.00	\$3,785.00

## MECHANICAL SPECIFICATIONS


Dimensions: Inches	18 3/4 x 12 x 8	18 3/4 x 12 x 8	18 3/4 x 12 x 8	18 3/4 x 12 x 8
Nema Box Metric	477 x 305 x 204	477 x 305 x 204	477 x 305 x 204	477 x 305 x 204
Dimensions: Inches	3 1/2 x 19 x 10	3 1/2 x 19 x 10	3 1/2 x 19 x 10	4 3/4 x 19 x 10
Multi. Tray Metric	89 x 483 x 254	89 x 483 x 254	89 x 483 x 254	121 x 483 x 254
Connectors: Input	N	N	N	N
Output	BNC	N	BNC	N
Ship Weight: lbs.	40	40	40	40
kg.	18.2	18.2	18.2	18.2

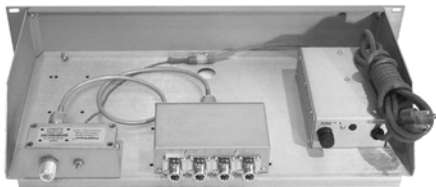


96104-0/P-5D

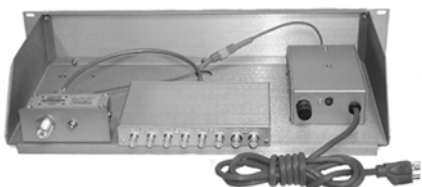

96108-1/P-5D

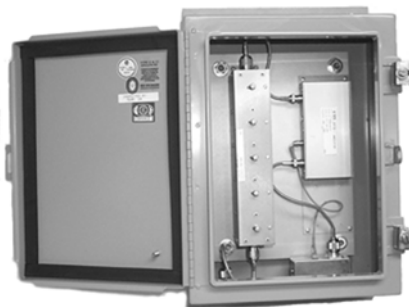

Nema Box for all models on this page.

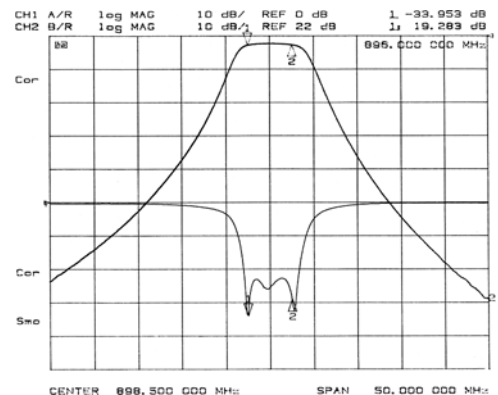

RECEIVER MULTICOUPLER - TOWER TOP



# MULTICOUPLERS 800 & 900 SMR TRUNKING

## ELECTRICAL SPECIFICATIONS

Model Number	96112-1/P-5D	96112-0/P-5D	96116-1/P-5D	96116-0/P-5D
Frequency Band (MHz)	894-960	894-960	894-960	894-960
# of Channels	9-12	9-12	13-16	13-16
Pass Band	3-15 MHz	3-15 MHz	3-15 MHz	3-15 MHz
# of Resonators	5	5	5	5
Rx/Rx Isolation	23+ dB	23+ dB	23+ dB	23+ dB
System Voltage	115 VAC	115 VAC	115 VAC	115 VAC
Amplifier Gain	+28 dB	+28 dB	+28 dB	+28 dB
Amplifier Type	Bipolar	Bipolar	Bipolar	Bipolar
Amplifier Noise Figure	3.0 dB	3.0 dB	3.0 dB	3.0 dB
Amplifier 3rd Order IP	+42 dBm	+42 dBm	+42 dBm	+42 dBm
Amplifier 1 dB Comp	+21 dBm	+21 dBm	+21 dBm	+21 dBm
Amplifier Bias Voltage	13.6 VDC	13.6 VDC	13.6 VDC	13.6 VDC
Amplifier Current Draw	200 mA	200 mA	200 mA	200 mA
System NF (typ.)	5.0 dB	5.0 dB	5.0 dB	5.0 dB
Nominal Impedance	50 Ω	50 Ω	50 Ω	50 Ω
Max. VSWR @ Resonance	1.25:1	1.25:1	1.25:1	1.25:1
Temperature Range	- 22 to +140 °F - 30 to +60 ° C	- 22 to +140 °F - 30 to +60 ° C	- 22 to +140 °F - 30 to +60 ° C	- 22 to +140 °F - 30 to +60 ° C
List Price	\$4,115.00	\$4,325.00	\$4,225.00	\$4,465.00

## MECHANICAL SPECIFICATIONS

Dimensions: Inches	18 3/4 x 12 x 8	18 3/4 x 12 x 8	18 3/4 x 12 x 8	18 3/4 x 12 x 8
Nema Box Metric	477 x 305 x 204	477 x 305 x 204	477 x 305 x 204	477 x 305 x 204
Dimensions: Inches	7 x 19 x 10	7 x 19 x 10	7 x 19 x 10	7 x 19 x 10
Multi. Tray Metric	178 x 483 x 254	178 x 483 x 254	178 x 483 x 254	178 x 483 x 254
Connectors: Input	N	N	N	N
Output	BNC	N	BNC	N
Ship Weight: lbs.	43	43	44	44
kg.	19.6	19.6	20.0	20.0

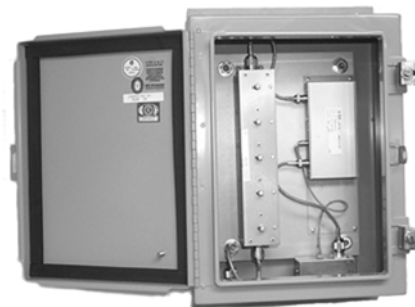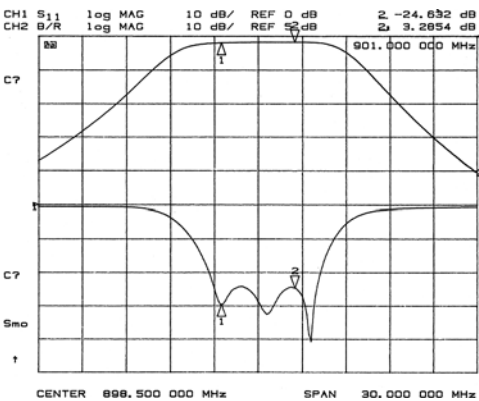

Nema Box for all models on this page.



96112-0/P-5D



96116-1/P-5D

RECEIVER MULTICOUPLER - TOWER TOP

# MULTICOUPLERS

## 800 & 900 SMR TRUNKING


RECEIVER MULTICOUPLER - TOWER TOP

### ELECTRICAL SPECIFICATIONS

Model Number	96124-1/P-5D	96124-0/P-5D	96132-1/P-5D	96132-0/P-5D
Frequency Band (MHz)	894-960	894-960	894-960	894-960
# of Channels	17-24	17-24	25-32	25-32
Pass Band	3-15 MHz	3-15 MHz	3-15 MHz	3-15 MHz
# of Resonators	5	5	5	5
Rx/Rx Isolation	23+ dB	23+ dB	23+ dB	23+ dB
System Voltage	115 VAC	115 VAC	115 VAC	115 VAC
Amplifier Gain	+28 dB	+28 dB	+28 dB	+28 dB
Amplifier Type	Bipolar	Bipolar	Bipolar	Bipolar
Amplifier Noise Figure	3.0 dB	3.0 dB	3.0 dB	3.0 dB
Amplifier 3rd Order IP	+42 dBm	+42 dBm	+42 dBm	+42 dBm
Amplifier 1 dB Comp	+21 dBm	+21 dBm	+21 dBm	+21 dBm
Amplifier Bias Voltage	13.6 VDC	13.6 VDC	13.6 VDC	13.6 VDC
Amplifier Current Draw	200 mA	200 mA	200 mA	200 mA
System NF (typ.)	5.0 dB	5.0 dB	5.0 dB	5.0 dB
Nominal Impedance	50 Ω	50 Ω	50 Ω	50 Ω
Max. VSWR @ Resonance	1.25:1	1.25:1	1.25:1	1.25:1
Temperature Range	- 22 to +140 °F - 30 to +60 ° C	- 22 to +140 °F - 30 to +60 ° C	- 22 to +140 °F - 30 to +60 ° C	- 22 to +140 °F - 30 to +60 ° C
List Price	\$4,785.00	\$5,025.00	\$5,245.00	\$5,695.00

### MECHANICAL SPECIFICATIONS


Dimensions: Inches	18 3/4 x 12 x 8	18 3/4 x 12 x 8	18 3/4 x 12 x 8	18 3/4 x 12 x 8
Nema Box Metric	477 x 305 x 204	477 x 305 x 204	477 x 305 x 204	477 x 305 x 204
Dimensions: Inches	10 1/2 x 19 x 10	10 1/2 x 19 x 10	10 1/2 x 19 x 10	11 3/4 x 19 x 10
Multi. Tray Metric	267 x 483 x 254	267 x 483 x 254	267 x 483 x 254	299 x 483 x 254
Connectors: Input	N	N	N	N
Output	BNC	N	BNC	N
Ship Weight: lbs.	48	49	52	54
kg.	21.8	22.3	23.6	24.5

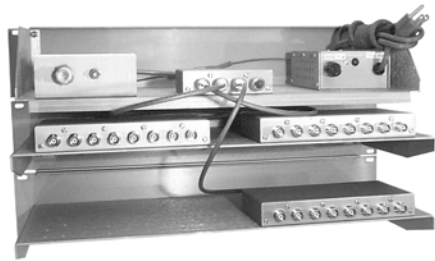


96124-1/P-5D



96132-0/P-5D

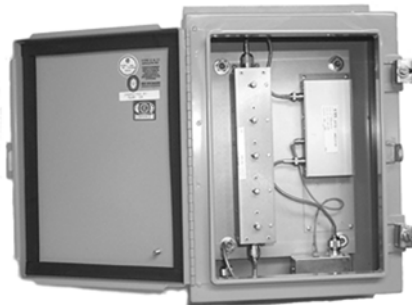

Nema Box for all models on this page.

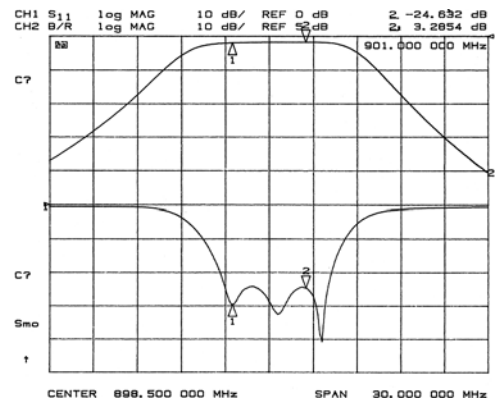

# MULTICOUPLERS

## 800 & 900 SMR TRUNKING

RECEIVER MULTICOUPLER - TOWER TOP

### ELECTRICAL SPECIFICATIONS

Model Number	96124-1/P-5C	96124-0/P-5C	96132-1/P-5C	96132-0/P-5C
Frequency Band (MHz)	806-894	806-894	806-894	806-894
# of Channels	17-24	17-24	25-32	25-32
Pass Band	3-15 MHz	3-15 MHz	3-15 MHz	3-15 MHz
# of Resonators	5	5	5	5
Rx/Rx Isolation	23+ dB	23+ dB	23+ dB	23+ dB
System Voltage	115 VAC	115 VAC	115 VAC	115 VAC
Amplifier Gain	+28 dB	+28 dB	+28 dB	+28 dB
Amplifier Type	Bipolar	Bipolar	Bipolar	Bipolar
Amplifier Noise Figure	3.0 dB	3.0 dB	3.0 dB	3.0 dB
Amplifier 3rd Order IP	+42 dBm	+42 dBm	+42 dBm	+42 dBm
Amplifier 1 dB Comp	+21 dBm	+21 dBm	+21 dBm	+21 dBm
Amplifier Bias Voltage	13.6 VDC	13.6 VDC	13.6 VDC	13.6 VDC
Amplifier Current Draw	200 mA	200 mA	200 mA	200 mA
System NF (typ.)	5.0 dB	5.0 dB	5.0 dB	5.0 dB
Nominal Impedance	50 Ω	50 Ω	50 Ω	50 Ω
Max. VSWR @ Resonance	1.25:1	1.25:1	1.25:1	1.25:1
Temperature Range	- 22 to +140 °F - 30 to +60 °C	- 22 to +140 °F - 30 to +60 °C	- 22 to +140 °F - 30 to +60 °C	- 22 to +140 °F - 30 to +60 °C
List Price	\$4,785.00	\$5,025.00	\$5,245.00	\$5,695.00

### MECHANICAL SPECIFICATIONS

Dimensions: Inches	18 3/4 x 12 x 8	18 3/4 x 12 x 8	18 3/4 x 12 x 8	18 3/4 x 12 x 8
Nema Box Metric	477 x 305 x 204	477 x 305 x 204	477 x 305 x 204	477 x 305 x 204
Dimensions: Inches	10 1/2 x 19 x 10	11 3/4 x 19 x 10	10 1/2 x 19 x 10	11 3/4 x 19 x 10
Multi. Tray Metric	267 x 19 x 10	299 x 483 x 254	267 x 483 x 254	299 x 483 x 254
Connectors: Input	N	N	N	N
Output	BNC	N	BNC	N
Ship Weight: lbs.	48	49	52	54
kg.	21.8	22.3	23.6	24.5


96124-0/P-5C



96132-0/P-5C



Nema Box for all models on this page.

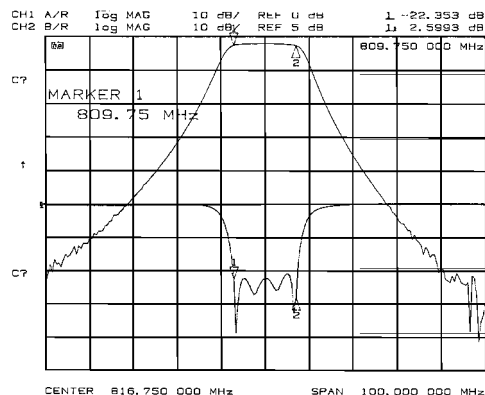

# MULTICOUPLERS 800 & 900 SMR TRUNKING

## ELECTRICAL SPECIFICATIONS


Model Number	96148-1/P-5C	96148-0/P-5C	96164-1/P-5C	96164-0/P-5C
Frequency Band (MHz)	806-894	806-894	806-894	806-894
# of Channels	33-48	33-48	49-64	49-64
Pass Band	3-15 MHz	3-15 MHz	3-15 MHz	3-15 MHz
# of Resonators	5	5	5	5
Rx/Rx Isolation	23+ dB	23+ dB	23+ dB	23+ dB
System Voltage	115 VAC	115 VAC	115 VAC	115 VAC
Amplifier Gain	+28 dB	+28 dB	+28 dB	+28 dB
Amplifier Type	Bipolar	Bipolar	Bipolar	Bipolar
Amplifier Noise Figure	3.0 dB	3.0 dB	3.0 dB	3.0 dB
Amplifier 3rd Order IP	+42 dBm	+42 dBm	+42 dBm	+42 dBm
Amplifier 1 dB Comp	+21 dBm	+21 dBm	+21 dBm	+21 dBm
Amplifier Bias Voltage	13.6 VDC	13.6 VDC	13.6 VDC	13.6 VDC
Amplifier Current Draw	200 mA	200 mA	200 mA	200 mA
System NF (typ.)	5.0 dB	5.0 dB	5.0 dB	5.0 dB
Nominal Impedance	50 $\Omega$	50 $\Omega$	50 $\Omega$	50 $\Omega$
Max. VSWR @ Resonance	1.25:1	1.25:1	1.25:1	1.25:1
Temperature Range	- 22 to +140 °F - 30 to +60 ° C	- 22 to +140 °F - 30 to +60 ° C	- 22 to +140 °F - 30 to +60 ° C	- 22 to +140 °F - 30 to +60 ° C
List Price	\$6,480.00	\$7,190.00	\$7,380.00	\$8,185.00

## MECHANICAL SPECIFICATIONS

Dimensions: Inches	18 3/4 x 12 x 8	18 3/4 x 12 x 8	18 3/4 x 12 x 8	18 3/4 x 12 x 8
Nema Box Metric	477 x 305 x 204	477 x 305 x 204	477 x 305 x 204	477 x 305 x 204
Dimensions: Inches	14 x 19 x 10	14 x 19 x 10	17 1/2 x 19 x 10	18 3/4 x 19 x 10
Multi. Tray Metric	356 x 483 x 254	356 x 483 x 254	445 x 483 x 254	477 x 483 x 254
Connectors: Input	N	N	N	N
Output	BNC	N	BNC	N
Ship Weight: lbs.	56	59	60	64
kg.	25.5	26.8	28.2	29.1



96148-1/P-5C

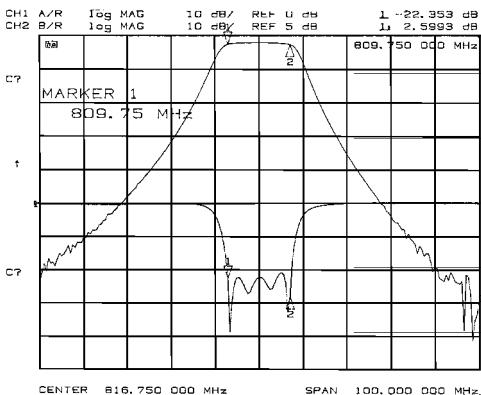

Nema Box for all models on this page.



96164-0/P-5C

RECEIVER MULTICOUPLER - TOWER TOP