


SPECIFICATIONS

ELECTRICAL:

FREQUENCY: 0-6 GHZ
 VSWR @ 6 GHZ: 1.2:1 MAX
 POWER (AVG) 2.0 WATTS @ 25 DEG C
 IMPEDANCE: 50 OHMS
 OP. TEMP RANGE: -55C- +125C

MECHANICAL:

MATERIAL BODY: GOLD PLATED BRASS
 CENTER CONTACT: GOLD PLATED PER MIL-G-45204
 RESISTIVE ELEMENT: THIN FILM ON ALUMINA SUBSTRATE
 RECOMMENDED TORQUE: 5-7 IN-LBS

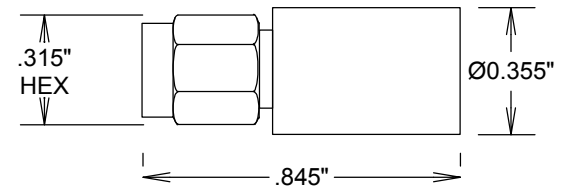

				FAIRVIEW MICROWAVE	
				ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	
				TITLE	
				TERMINATION 6GHZ 2 WATTS SMA-MALE	
SIZE	CAGE CODE	DWG NO	REV		
A	3FKR5	ST0625	-		
SCALE			SHEET		