


SPECIFICATIONS

ELECTRICAL:

FREQUENCY: 0-26.5 GHZ
 VSWR 1.3:1 MAX
 POWER (AVG) 1 WATTS
 POWER (PEAK) 250W/5 MICRO-S
 IMPEDANCE: 50 OHMS
 OP. TEMP RANGE: -55C- +125C

MECHANICAL:

MATERIAL BODY: ST2650 Au PLATED STAINLESS STEEL
 MATERIAL BODY: ST2659 PASSIVATED STAINLESS STEEL
 CENTER CONTACT: GOLD PLATED PER MIL-G-45204

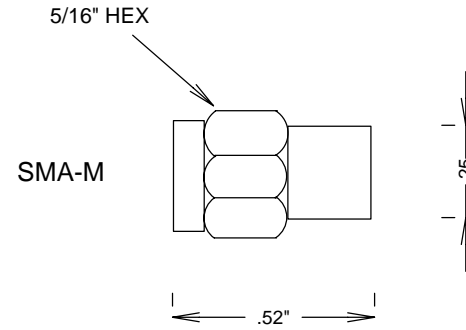

ST2650 Au PLATED STAINLESS STEEL

ST2659 PASSIVATED STAINLESS STEEL

| | | | | | |
|----------|--------------|--------|-----------------------|---|----------|
| | | | | S. M. ELECTRONICS | |
| | | | | FAIRVIEW, TX 75069 WWW.SMELECTRONICS.US | |
| | | | | TITLE | |
| | | | | TERMINATION 26.5GHZ SMA-MALE | |
| SIZE | CAGE CODE | DWG NO | ST2650, ST2659 | | REV |
| A | 3FKR5 | | | | A |
| SCALE | | | SHEET | | |