

# SPECIFICATIONS


## ELECTRICAL:

FREQUENCY: 0-3 GHZ  
 VSWR 1.25 MAX @ 3 GHZ  
 POWER (AVG) 50 WATTS @ 25 DEG C  
 POWER (PEAK) 500 WATTS  
 IMPEDANCE: 50 OHMS

## MECHANICAL:

MATERIAL CONNECTORS: BRASS TRIMETAL PLATED  
 MATERIAL CONTACTS: BeCu  
 CENTER CONTACT: GOLD PLATED BRASS  
 INSULATOR: TEFLON  
 TEMP: -45 C TO +125 C

ROHS COMPLIANT

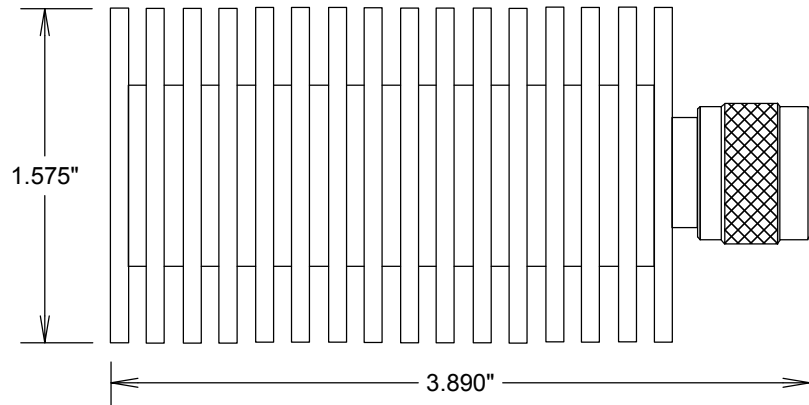

				<b>FAIRVIEW MICROWAVE</b>	
				FAIRVIEW, TX <a href="http://WWW.FAIRVIEWMICROWAVE.COM">WWW.FAIRVIEWMICROWAVE.COM</a>	
				TITLE	
				<b>TERMINATION N/M 3 GHZ 50W</b>	
SIZE		CAGE CODE	DWG NO	REV	
<b>A</b>		3FKR5	ST3N501	--	
SCALE			SHEET		