

SPECIFICATIONS


ELECTRICAL:

FREQUENCY: 0-40 GHZ
 VSWR @ 40GHZ: 1.25:1 MAX
 POWER (AVG) 1 WATT
 POWER (PEAK) 1KW/50 MICRO-S
 IMPEDANCE: 50 OHMS
 OP. TEMP RANGE: -55 to+125°C

MECHANICAL:

MATERIAL BODY: PASSIVATED STAINLESS STEEL
 CENTER CONTACT: Au PLATED PER MIL-G-45204
 COUPLING NUT TORQUE: 8-10 IN-LBS

INTERFACE: MIL-STD-348A

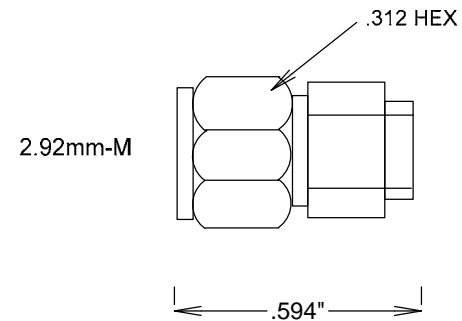

				S. M. ELECTRONICS	
				FAIRVIEW, TX WWW.SMELECTRONICS.US	
				TITLE	
				TERMINATION 40 GHZ 2.92-MALE	
		SIZE	CAGE CODE	DWG NO	REV
		A	3FKR5	ST4015	--
				SCALE	SHEET