

SPECIFICATIONS

ELECTRICAL:


FREQUENCY: 0-6 GHZ
 VSWR 1.15 MAX TO 6 GHZ
 POWER (AVG) 10 WATTS @ 25 DEG C
 POWER (PEAK) 500 WATTS MAX
 IMPEDANCE: 50 OHMS

TEMPERATURE: -65 TO +125° C
 DERATES LINEARLY TO 10% AT 125° C

MECHANICAL:

MATERIAL CONNECTORS: PASSIVATED STAINLESS STEEL
 CENTER CONTACT: BRASS Au PLATED PER MIL-G-45204

RECOMMENDED TORQUE: 7-9 IN-LBS

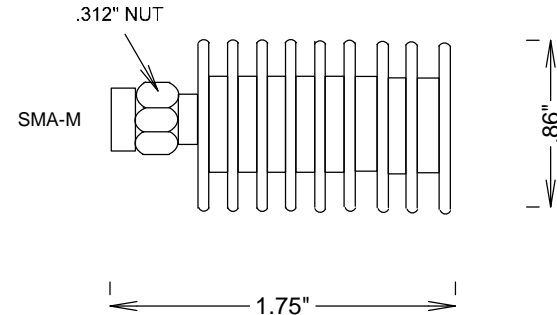

				S. M. ELECTRONICS	
				FAIRVIEW, TX WWW.SMELECTRONICS.US	
				TITLE	
				TERMINATION SMA/MALE 6GHZ 10WATTS	
SIZE	CAGE CODE	DWG NO	REV		
A	3FKR5	ST6S-10	--		
SCALE			SHEET		