

SPECIFICATIONS

ELECTRICAL:

FREQUENCY: 0-6 GHZ
 VSWR 1.2 MAX TO 6 GHZ
 POWER (AVG) 20 WATTS @ 25 DEG C
 IMPEDANCE: 50 OHMS


MECHANICAL:

MATERIAL CONNECTORS: PASSIVATED STAINLESS STEEL
 MATERIAL RING & CONTACTS: BeCu
 CENTER CONTACT: GOLD PLATED PER MIL-G-45204

RECOMMENDED TORQUE: 7-9 IN-LBS

ENVIRONMENTAL:

TEMP: -55 C TO +125 C

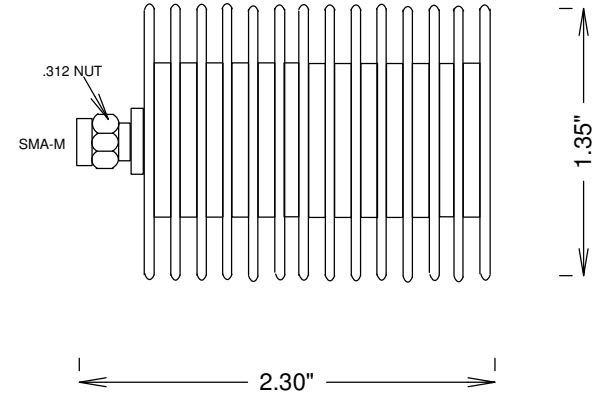

				DBD COMMUNICATIONS LINE CARD	
				TITLE	
				TERMINATION SMA/MALE 6GHZ 20WATTS	
SIZE	CAGE CODE	DWG NO		REV	
A		ST6S20		--	
SCALE			SHEET		