

SPECIFICATIONS

ELECTRICAL:


FREQUENCY: 0-6 GHZ
 VSWR: 1.25:1 MAX TO 6 GHZ
 POWER (AVG) 5 WATTS @ 25° C
 POWER DERATES LINEARLY TO 1 WATT @ 125° C
 IMPEDANCE: 50 OHMS

MECHANICAL:

MATERIAL BODY: ALBALOY PLATED BRASS
 MATERIAL CONTACT: Au PLATED BRASS

ENVIRONMENTAL:

TEMP: -55° C TO +125° C
 CORROSION(SALT SPRAY): MIL-STD-202 METHOD 101 METHOD B
 VIBRATION: MIL-STD-202 METHOD 204 CONDITION D
 SHOCK: MIL-STD-202 METHOD 213 CONDITION I
 THERMAL SHOCK: MIL-STD-202 METHOD 107 CONDITION B
 MOISTURE RESISTANCE: MIL-STD-202 METHOD 106

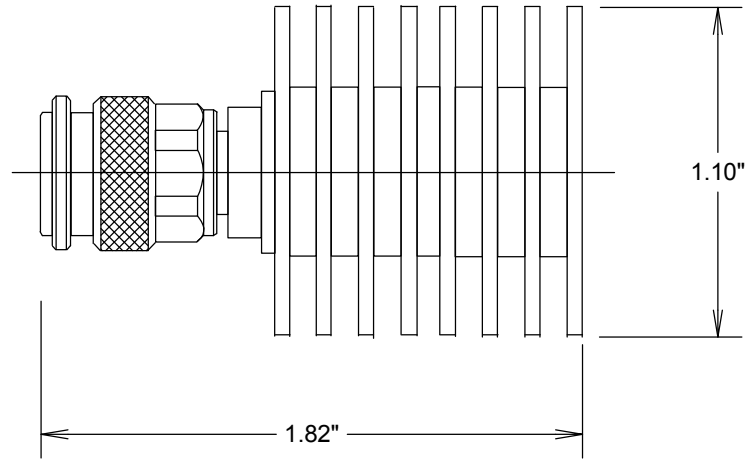

				FAIRVIEW MICROWAVE			
				ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM			
				TITLE			
				TERMINATION TNC/MALE 6 GHZ 5 WATTS			
SIZE		CAGE CODE		DWG NO		REV	
A		3FKR5		ST6T-5W		--	
SCALE				SHEET			