


SPECIFICATIONS

ELECTRICAL:

FREQUENCY: 0-18 GHZ
 VSWR 1.15 MAX TO 12.4 GHZ
 1.25 MAX TO 18 GHZ
 POWER (AVG) 5 WATTS @ 25 DEG C
 IMPEDANCE: 50 OHMS

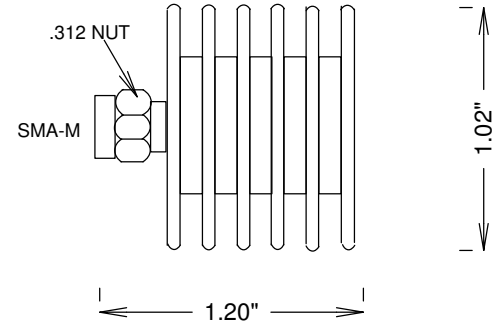

MECHANICAL:

MATERIAL CONNECTORS: PASSIVATED STAINLESS STEEL
 MATERIAL RING & CONTACTS: BeCu
 CENTER CONTACT: GOLD PLATED PER MIL-G-45204

RECOMMENDED TORQUE: 7-9 IN-LBS

ENVIRONMENTAL:

TEMP: -55 C TO +125 C

				DBD COMMUNICATIONS LINE CARD	
				TITLE	
				TERMINATION SMA/MALE 18GHZ 5WATTS	
SIZE	CAGE CODE	DWG NO	REV		
A		ST3057	--		
SCALE			SHEET		