

INNER DC BLOCK 380-200MHZ 7/16

SD3085


SPECIFICATIONS

ELECTRICAL

FREQUENCY: 800-2200 MHZ
 DEGRADED PERFORMANCE 380MHZ-800MHZ
 POWER: 250W AVG
 IMPEDANCE: 50 OHMS
 VSWRmax: 1.20:1 MAX 800-2200 MHZ;
 VSWRin: 1.351 MAX 380-800MHZ
 LOSS: 0.1 DB MAX 800-2200MHZ
 LOSS 380MHZ 0.25 DB
 IP2 <140 dBc MAX (2 @ +43DBM)

MECHANICAL

MATERIALS BODY: PASSIVATED ALUMINUM
 CONNECTORS: N-FEMALE, Si OR TRIPLATE
 TEMP RANGE: -35 TO +75° C
 IP65

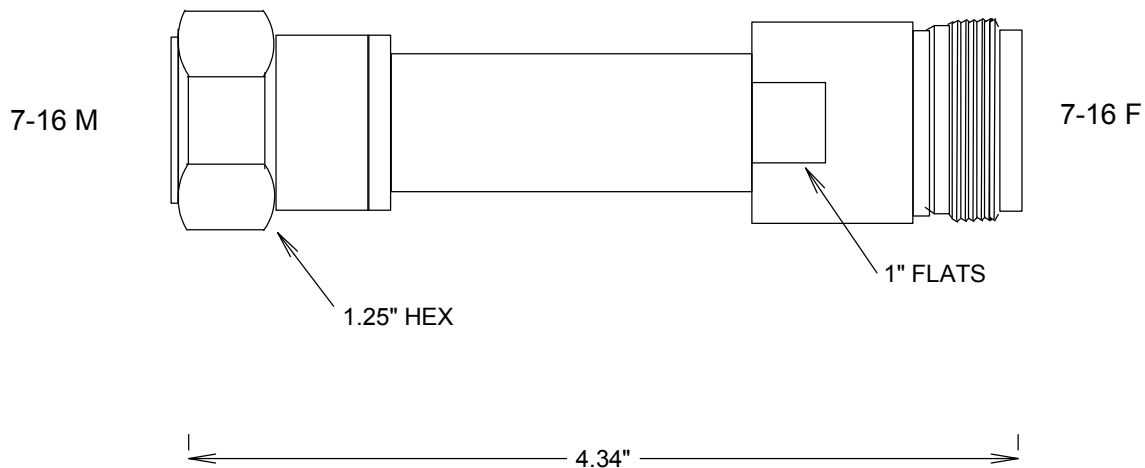

				FAIRVIEW MICROWAVE INC.	
				ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	
				TITLE	
				INNER DC BLOCK 380-200MHZ 7/16	
SIZE	CAGE CODE	DWG NO	SD3085		
A	3FKR5				
SCALE			SHEET		