

SPECIFICATIONS

ELECTRICAL:



FREQUENCY: 0-11 GHZ
 VSWR 1.3:1 MAX
 IMPEDANCE: 50 OHMS

MECHANICAL:

MATERIAL BODY: NICKLE PLATED BRASS
 CENTER CONTACT: BeCu
 CONTACT PLATING: Si QQ-S-365
 CAPTIVATED CONTACT
 INSULATOR: TEFLON
 INTERFACE: MIL-STD-348B
 ROHS COMPLIANT
 OP. TEMP RANGE: -55°C- +155°C

ASSEMBLY INSTRUCTIONS:

SLIDE BACKNUT ONTO CABLE
 TRIM CABLE AS SHOWN
 SLIT CABLE, 2 PLACES AS SHOWN, 180° APART
 SLIDE PIN ASSEMBLY UNDER BRAID
 SOLDER PIN ASSEMBLY TO CENTER CONDUCTOR
 INSERT ASSEMBLY INTO BODY
 TIGHTEN BY HOLDING NUT, TURNING BODY

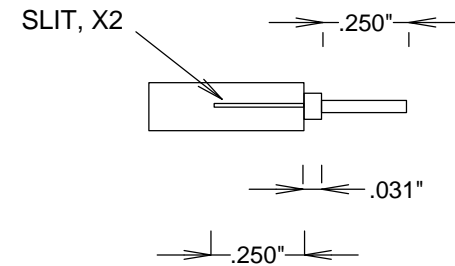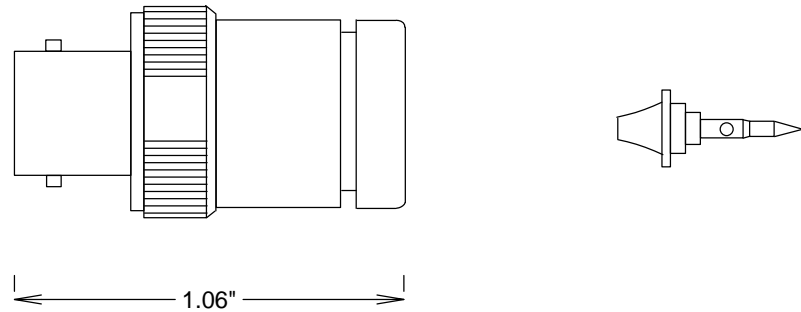

STRIPPING DIMENSIONS

				S. M. ELECTRONICS L.L.C.	
				FAIRVIEW, TX 75069 WWW.SMELECTRONICS.US	
				TITLE	
				BNC-F RG316 RG174 GRIP	
SIZE	CAGE CODE	DWG NO	REV		
A	3FKR5	SC6013	--		
SCALE			SHEET		