



AERONAUTICAL INTERMODULATION CONTROL DEVICES

ISOLATORS & CIRCULATORS


Model No. List Price	Description	Frequency	Pwr: Input Refl	Bandwidth: Fixed Tunable	Insertion Loss	Isolation	Load Termination	Actual Dimensions Inches Metric	Ship Wt. lbs kg.
AE7440/3A \$450.00	Single Isolator, 30 Watt Load	118-138	50 W 30 W	See Page 38 Figure 3 & 4	0.30 dB	35+ dB	30 W	1 3/8 x 3 1/2 x 4 1/8 35 x 89 x 105	4 1.9
AE8440/23A \$720.00	Dual Isolator, 15/30 Watt Load	118-138	50 W 30 W	See Page 42 Figure 1 & 2	0.45 dB	70+ dB	15/30 W	1 1/2 x 5 1/2 x 5 5/8 39 x 140 x 143	3 1.4
AE7440/3E \$450.00	Single Isolator, 30 Watt Load	225-300	50 W 30W	See Page 38 Figure 3 & 4	0.30 dB	35+ dB	30 W	1 3/8 x 3 1/2 x 4 1/8 35 x 89 x 105	4 1.9
AE8440/23E \$720.00	Dual Isolator, 15/30 Watt Load	225-300	50 W 30 W	See Page 42 Figure 1 & 2	0.45 dB	70+ dB	15/30 W	1 1/2 x 5 1/2 x 4 1/8 39 x 140 x 105	3 1.4
AE7530/0 \$350.00	Single Isolator, 20 Watts	300-400	20 W 10 W	See Page 40 Figure 1 & 2	0.30 dB	35+ dB	0	1 3/8 x 3 1/2 x 3 35 x 96 x 77	3 1.4
AE7540/3 \$430.00	Single Isolator, 30 Watt Load	300-400	50 W 30 W	See Page 40 Figure 1 & 2	0.30 dB	35+ dB	30 W	1 3/8 x 3 1/2 x 4 1/8 35 x 96 x 105	3 1.4
AE8540/22 \$715.00	Dual Isolator, 15/15 Watt Load	300-400	30 W 15 W	See Page 43 Figure 3 & 4	0.45 dB	70+ dB	15/15 W	1 3/8 x 5 1/2 x 4 1/8 35 x 140 x 105	3 1.4




AE7440/3A
AE7440/3E

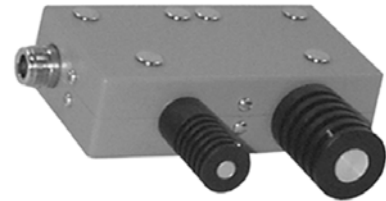

AE8440/23A
AE8440/23E



AE7530/0

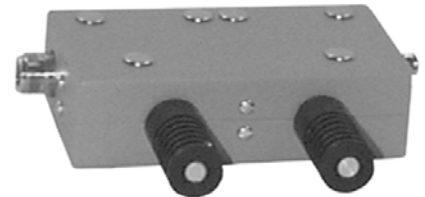

AE8540/22



AE7540/3